



AOPEN

Bright Ideas Connected

dTILE



32" open frame commercial grade dTILE 32-D


The dTILE 32-D is a commercial grade open frame model and AOPEN's first 32" touch display. The dTILE has a 350 nits panel which is IP65 grade dust- and waterproof. This screen also has a 10 points PCAP touch screen. With 4 mounting holes, and 8 included clamps, this open frame model is more diverse in its mounting possibilities than most others.



The dTILE 32-D features:

- + Open Frame Model
- + 31.5", 1920 x 1080px, VA panel
- + IP65 dust- and waterproof grade
- + VESA Mounting Holes 400 x 200 mm
- + Mosh 5 glass hardness

dTILE 32-D

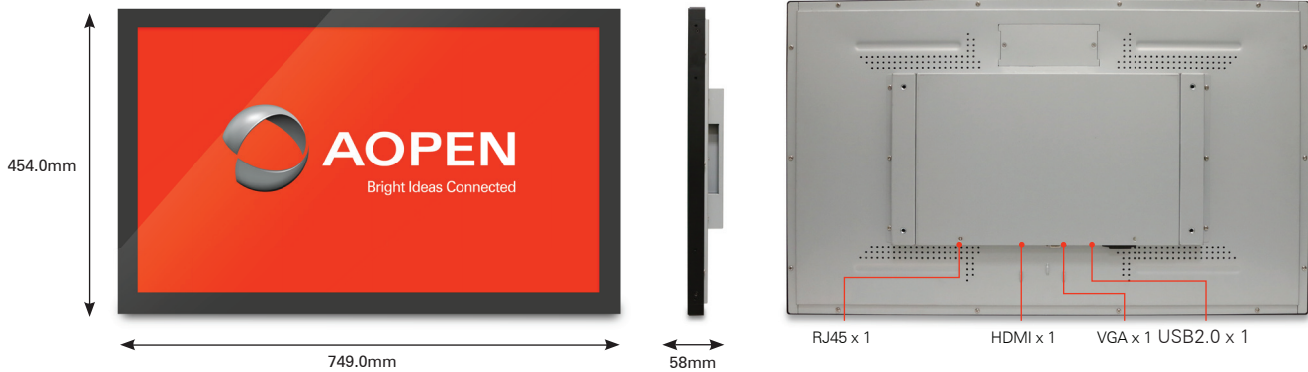

Model name		dTILE 32-D
Housing Material		Metal
Dimensions	Unit Size (W x H x D)	749 x 454 x 58 mm
	Display Area (H x V)	699 x 393 mm
	Packaging Size	860 x 560 x 170 mm
	Mounting Size	VESA 400 x 200mm
Weight	Net Weight	13.3 kgs
	Gross Weight	19 kgs
Front Panel	Resolution	31.5" 1920 x 1080 (16:9)
	Max Brightness	350 NITS
	Panel Type	VA
	Viewing Angle	178 / 178
	Response Time	6ms
	Contrast Ratio	1400:1
	Touch	PCT supports 10 points
	Colour	16.7M
	Glass Hardness	Mosh 5
Side Panel I/O	Power Button	x 1
	Brightness Up	-
	Brightness Down	-
	Other	-
System I/O	DC Jack	x 1 (12 ~ 19V)
	Graphic Port	x 2 (1x HDMI, 1x VGA)
	USB 2.0 Port	x 1
	USB 3.0 Port	-
	RJ45	x 1
	COM Port	-
	Audio in	-
Adapter		95W / 19V
Input Voltage		AC 12 ~ 19V
Warranty		2 Years
Environment	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Relative Humidity	90% RH (40°C non-Condensing)



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.