




AOPEN

Bright Ideas Connected

dTILE

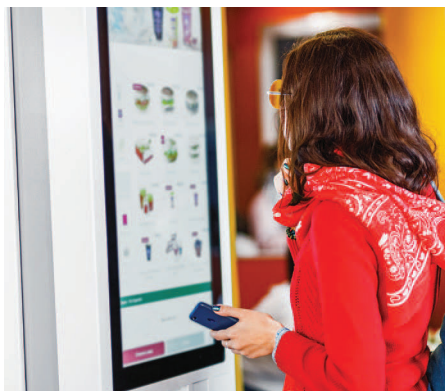


22" open frame for industrial kiosks dTILE 22-O

The AOPEN dTILE 22-O is a cost-effective, industrial-grade open frame touch display. The dTILE 22-O is designed for interactive kiosk applications. With its flat zero-bezel, and dust- and waterproof grade, this device is perfect for commercial environments. The device has an AMTouch module, which enables the touch display to respond when wearing various gloves, which is essential in an industrial environment. The dTILE 22-O offers the versatility needed for commercial and industrial kiosk applications from self-service to industrial automation and healthcare.

The dTILE 22-O features:

- + AMTouch module for customisation
- + Compact and fanless design
- + IP65 Grade on front panel and IK08 Grade chassis
- + Windows based to adjust the sensitivity level of touch
- + Wide Viewing Angle

dTILE 22-O

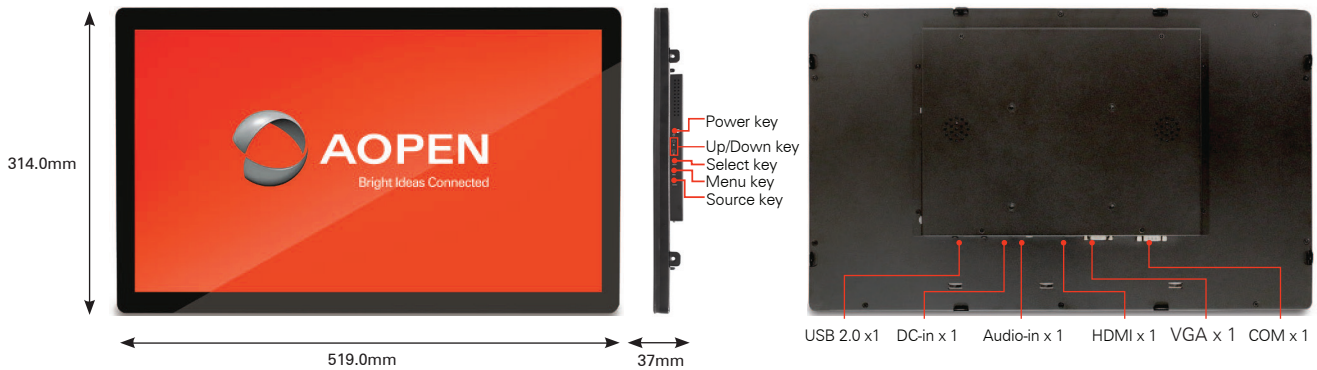

Model name		dTILE 22-O
Housing Material		Metal
Dimensions	Unit Site (W x H x D)	519 x 314 x 37 mm
	Display Area (H x V)	476.67 x 268.11 mm
	Packaging Size	606 x 468 x 164 mm
	Mounting Size	VESA 100 x 100mm
Weight	Net Weight	5.04kgs
	Gross Weight	8.36kgs
Front Panel	Resolution	21,5" 1920 x 1080 (16:9)
	Max Brightness	250 NITS
	Panel Type	VA
	Viewing Angle	178/178
	Response Time	18ms
	Contrast Ratio	3000:1
	Touch	PCT supports 5 points
	Colour	16.7M
	Glass Hardness	Mosh 5
Side Panel I/O	Power Button	x 1
	Brightness Up	x 1
	Brightness Down	x 1
	Other	Select Key x 1, Menu Key x 1, Source Key x 1
System I/O	DC Jack	x 1 (12 ~ 19V)
	Graphic Port	x 2 (x 1 HDMI, x 1 VGA)
	USB 2.0 Port	x 1
	USB 3.0 Port	-
	COM Port	x 1
	Audio in	x 1
Adapter		65W/19V
Input Voltage		AC 12 ~ 19V
Warranty		3 Years
Environment	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Relative Humidity	90% RH (40°C non-Condensing)

